

Anti-Vandal Pushbutton Switches




Specifications:

Insulation resistance:	> 1000 MΩ at 500 V DC
Operating temperature:	– 20° to + 55° C
Switching force:	off – mom
Material:	Contact: silver plated alloy Nut: nickel plated brass

Models:


MAV 01 B1M1

Rating:	125 V AC, 2 A / 48 V DC, 2 A
Contact resistance:	<10 mΩ
Dielectric strength:	3000 V, 50 Hz (1 min.)
Electrical life:	10 000 cycles

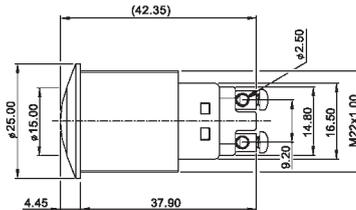


MAV 01 B2M1R

Rating:	36 V DC, 2 A
Contact resistance:	< 50 mΩ
Dielectric strength:	2000 V, 50 Hz (1 min.)
Electrical life:	200 000 cycles
Protection:	IP 65



MAV 01 B32M3F

Rating:	36 V DC, 2 A
Contact resistance:	< 50 mΩ
Dielectric strength:	2000 V, 50 Hz (1 min.)
Electrical life:	200 000 cycles
Protection:	IP 65



Ordering code:

